
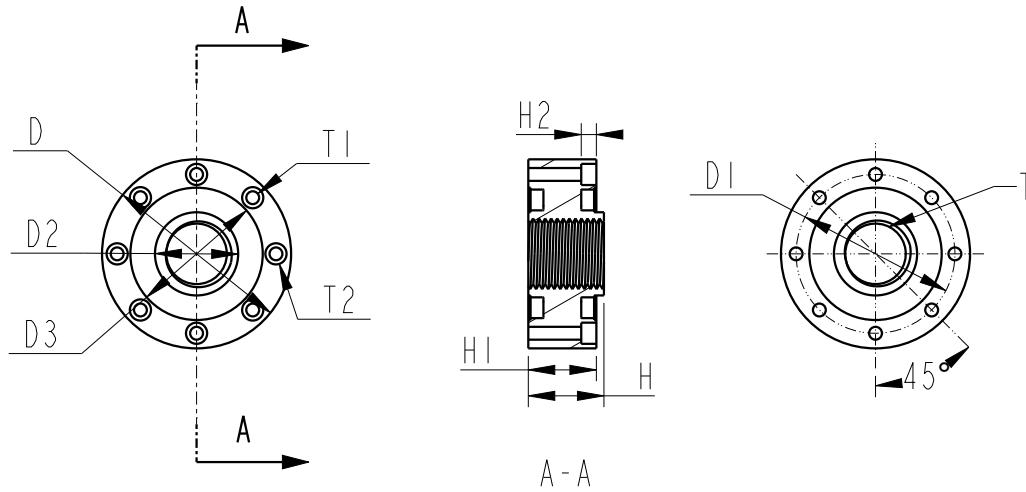



客户图



MARK	DATE	ECO NO.	DESCRIPTION	REV.	DESIGN
①			首版发行	1	Eric

产品参数

测量范围 Rated capacity	500, 1k, 2k, 5k, 10k, 20k, 50k, 60k, 100k, 200k kg
线性度 Nonlinearity	0.04% Of rated output
蠕变 Hysteresis	0.04% of rated output
重复性 Nonrepeatability	0.04% of rated output
灵敏度 Rated output, typical	2.0 mv/v
零点误差 Zero Balance	±1% of rated output
工作温度范围 Temperature Range, operating	-20~80℃
补偿温度范围 Temperature Range, compensated	-10~60℃
温度对输出的影响 Temperature Effect on Output	0.03% of rated output/10℃
温度对零点的影响 Temperature Effect on Zero	0.03% of rated output/10℃
输入电阻 Output Imdedance	380±30Ω
输出电阻 Output Imdedance	350±5Ω
标准激励电压 Excitation Voltage, typical	5VDC
最大激励电压 Excitation Voltage, maximum	10VDC
绝缘电阻 Insulation Resistance	≥5000MΩ/100VDC
安全过载 Maximum Load, safe	120% of rated output
破坏性过载 Maximum Load, ultimate	150% of rated output
防护等级 Protection class	IP67
材料 construction	Stainless steel or Alloy steel
接线定义 Wiring way	Exc+: Red Exc-: Black Sig+: Green Sig-: White

- 轮辐式结构 Pancake
- 拉压型 Tension&Compression only
- 防护等级 IP67 protection
- 定制化服务 Customizable size

size(mm) Cap(t)	D	D1	D2	D3	H	H1	H2	T	T1	T2	N
0.5/1/2.5	105	89	32	75	37	34	7.2	M16*1.5	7.5	10.5	8
10/15/20	120.6	101.8	39	83	48	41	10.5	M32*1.5	8.5	14	8
30/50	141	116.8	50.4	96.9	57.2	50.8	11	M40*1.5	11	18	8
60	153	130	70	110	58	51	16	M40*1.5	10.5	17	8
60/100	200	162	76	132	83	70	18	M60*2	13	20	16
150/200	250	210	110	170	100	90	20	M80*2	17	28	16

未标注尺寸公差 (±)				
尺寸	A	B	C	D
X≤4	0.05	0.1	0.2	0.3
4<X≤16	0.1	0.2	0.3	0.4
16<X≤63	0.2	0.3	0.4	0.7
63<X≤250	0.3	0.4	0.5	1.2
X>250	0.4	0.5	0.8	2.0

# BEDELL

苏州比得电子技术有限公司  
suzhou Bedell Electric Technology Ltd

		DATE	TITLE	Model 601A				
DESIGN	Eric	23/03/30	PART NO.					
VERIFIED					UNITS	SCALE	PAGE	REV
APPROVED					mm	1:1	1/1	1