
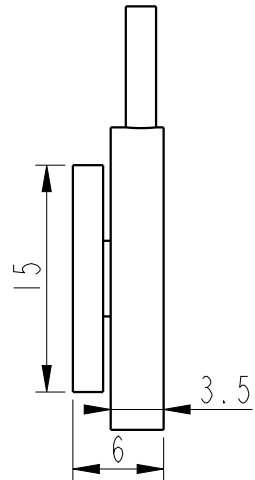
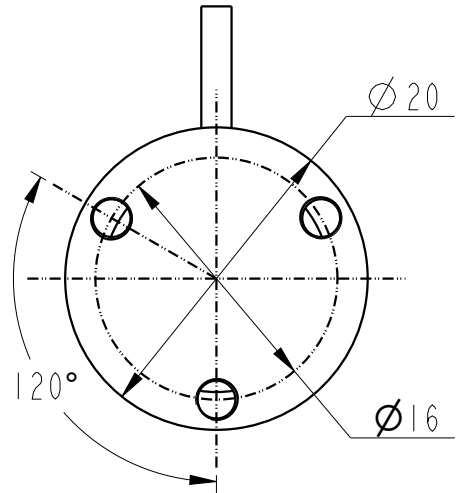
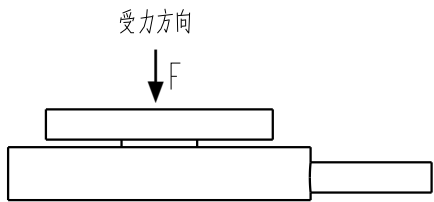


客户图



MARK	DATE	ECO NO.	DESCRIPTION	REV.	DESIGN
①			首版发行	1	Eric
产品参数					
测量范围 Rated capacity			5~50Kg		
线性度 Nonlinearity			±0.5%F.S.		
滞后 Hysteresis			±0.5%F.S.		
重复性 Nonrepeatability			±0.5%F.S.		
灵敏度 Rated output,typical			1.2~2.0mV/V		
零点误差 Zero Balance			±0.05mV/V		
工作温度范围 Temperature Range,operating			-20~60℃		
额定温度范围 Nominal temperature range			-10~40℃		
温度对输出的影响 Temperature Effect on Output			±0.5%F.S./10℃		
温度对零点的影响 Temperature Effect on Zero			±0.2%F.S./10℃		
输入电阻 Output Imdedance			380±30Ω		
输出电阻 Output Imdedance			350±5Ω		
标准激励电压 Excitation Voltage,typical			2.5~5VDC		
最大激励电压 Excitation Voltage,maximum			7VDC		
绝缘电阻 Insulation Resistance			≥5000MΩ/50VDC		
安全过载 Maximum Load,safe			120% of rated output		
破坏性过载 Maximum Load,ultimate			150% of rated output		
防护等级 Protection class			IP65		
材料 construction			Stainless steel		
接线定义 Wiring way			Exc+: Red Exc-: Black		
			Sig+: Green Sig-: White		

· 优质不锈钢材料

· 超微型结构

· 广泛应用于推拉力计，按键感度测试仪，机器人等压力测试仪和自动化设备测力领域

苏州比得电子科技有限公司

suzhou Bedell Electric Technology Ltd

		DATE		TITLE		Model 104H			
Eric		23/07/31		PART NO.					
						UNITS	SCALE	PAGE	REV
						mm	1:1	1/1	1